




{Stationary}

# 120 Gallon

## Electric - Two Stage

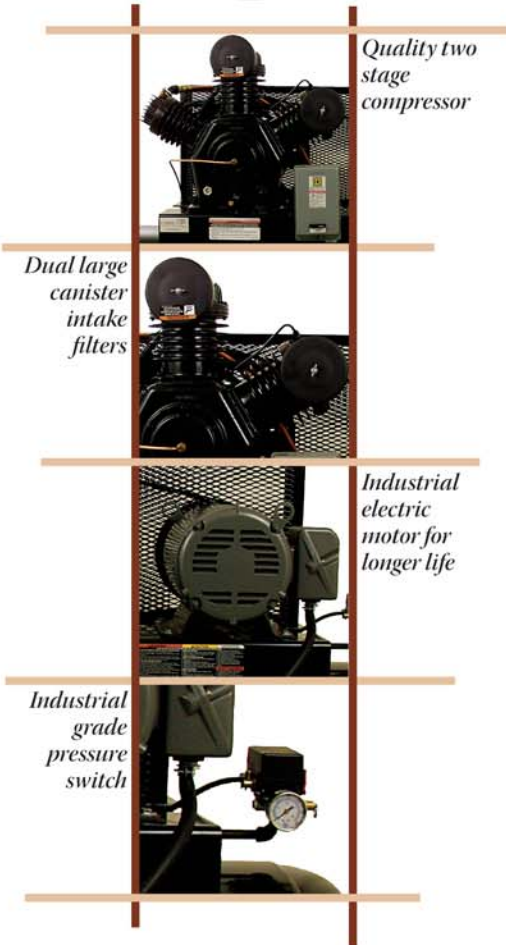

Quality two stage compressor

Dual large canister intake filters

Industrial electric motor for longer life

Industrial grade pressure switch



AS8-HE20-120M

Additional Features:

- ✓ Auto start/stop
- ✓ 230V three-phase motor
- ✓ Cast iron cylinder
- ✓ Splash lubricated cast iron crankcase
- ✓ Cast iron head
- ✓ Oil sight glass
- ✓ Large fly wheel for extra cooling and longer life
- ✓ 14-gauge powder coated one-piece belt guard for quick access to belts
- ✓ Two stage intercooler
- ✓ Powder coated ASME coded 120-gallon receiver tank
- ✓ 7-gauge base plate to reduce vibration
- ✓ Manual drain valves for proper maintenance
- ✓ Magnetic starter with mounting box and wiring

### Specifications:

Model #	AS4-HE10-120M	AS6-HE15-120M	AS8-HE20-120M
Motor	230V, 3Ø, 22.0A	230V, 3Ø, 40.0A	230V, 3Ø, 50.0A
Horsepower	10.0	15.0	20.0
CFM @ 175 PSI	30.5	43.8	54.9
Pump	Schulz	Schulz	Schulz
Dim. (LxWxH)	74in.x28in.x50in.	74in.x28in.x55in.	74in.x28in.x58in.
Shipping weight	904 lbs.	995 lbs.	1100 lbs.
Net weight	785 lbs.	876 lbs.	981 lbs.

Options:

Consult Factory 208-460V - Converts 230-volt units to 208-volt or 460-volt units

Consult Factory Single phase, 230V - Converts three-phase units to be operated on single-phase power

Model #	208-460V (C/F)	230V (C/F)
AS4-HE10-120M	●	●
AS6-HE15-120M	●	
AS8-HE20-120M	●	



**3R Sales & Service • 27 4th ST NW**  
**Barberton, OH 44203 • 330-753-8394**  
**www.3rsalesandservice.com**

**1-800-824-8252**