




{ Stationary }

30 Gallon Electric/Gasoline - Single/Two Stage

When high capacity and air flow is required on the job, opt for the Mi-T-M stationary 30-gallon air compressor. The gasoline models are ideal for service trucks!

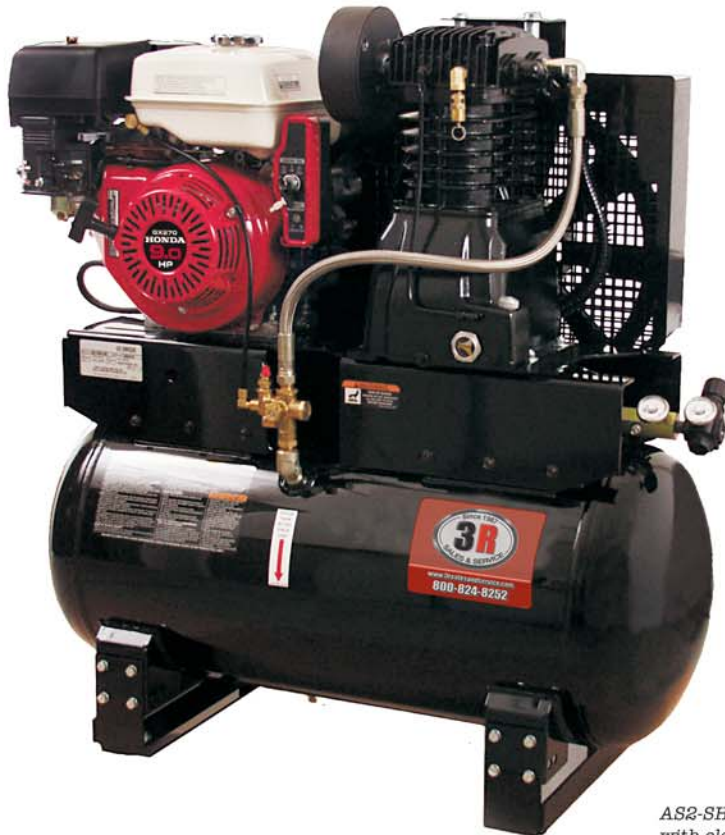

AS2-SH08-30M
with electric start
(AX-0015) option

Additional Features:

- ✓ Cast iron cylinder
- ✓ Splash lubricated cast iron crankcase (aluminum on 3.0 HP model)
- ✓ Aluminum head for heat dissipation
- ✓ Large canister intake filter
- ✓ 16.5-inch fly wheel for extra cooling and longer life (10-inch fly wheel on single stage model)
- ✓ Powder coated ASME coded 30-gallon receiver tank
- ✓ 7-gauge base plate to reduce vibration
- ✓ Manual drain valves for proper maintenance

Gasoline Features:

- ✓ Industrial Honda OHV or Subaru OHC, engine (electric start optional)
 - ✓ Engine oil drain
- Electric Features:**
- ✓ Industrial UL listed electric motor
 - ✓ Auto start/stop (continuous run optional)
 - ✓ Industrial grade pressure switch
 - ✓ Thermal overload motor protection
 - ✓ Magnetic starter



Quality single or two stage compressor



Stainless-steel braided discharge hose



Belt tightening system pulls engine straight to ensure constant belt alignment



Regulator and two gauges for tank and outlet pressure



14-gauge powder coated two-piece belt guard with 1/4-turn release for quick access to belts



Pneumatic idle control to conserve fuel (gasoline and diesel models only)

CSA Certified:
AS2-SE05-30M



Specifications:

Model #	AC1-SE03-30M	AS2-SE05-30M	AS2-S305-30M [^]	AS2-SE75-30M
Motor	230V, 14.0A	208-230V, 22.5-20.0A	208-230V, 3Ø, 13.2-12.2A	208-230V, 40.0-37.0 A
Horsepower	3.0	5.0	5.0	7.5
CFM @ 175 PSI	13.8 @ 100 PSI	16.9	16.9	23.4
Plug Type	NEMA 6-15P	NEMA 6-50P	NEMA L15-20P	NEMA 6-50P
Pump	Fini	Schulz	Schulz	Schulz
Dim. (LxWxH)	40.5in.x18.5in.x41.5in.	40.5in.x18.5in.x41.5in.	40.5in.x18.5in.x41.5in.	42in.x23.5in.x45in.
Shipping weight	425 lbs.	425 lbs.	385 lbs.	512 lbs.
Net weight	332 lbs.	332 lbs.	292 lbs.	442 lbs.

[^]Three-phase unit.



NEMA 6-15P,
15-amp plug



NEMA L15-20P,
20 amp plug

Model #	AS2-SH08-30M	AS2-SR09-30M	AS2-SH13-30M
Engine	Honda OHV	Subaru OHC	Honda OHV
Horsepower	9.0	9.0	13.0
CFM @ 175 PSI	17.2	17.2	24.0
Pump	Schulz	Schulz	Schulz
Dim. (LxWxH)	40in.x18.5in.x41.5in.	40in.x18.5in.x41.5in.	40in.x17.5in.x40.5in.
Shipping weight	410 lbs.	385 lbs.	403 lbs.
Net weight	317 lbs.	292 lbs.	310 lbs.



NEMA 6-50P,
50 amp plug

Options:

AX-0001	Auto drain metal bowl - Drains moisture from air system
AX-0002	Auto drain plastic bowl - Drains moisture from air system
AX-0003	Manual drain metal bowl - Drains moisture from air system
AX-0004	Manual drain plastic bowl - Drains moisture from air system
AX-0009	Dual control - Electric compressor can be operated in start/stop mode or continuous run where pilot valve exhausts air to atmosphere
AX-0015, AX-0019,	Electric start (battery & cables not included) - For easy starting
AX-0016, AX-0017	Electric start (battery & cables included) - For easy starting
AX-0022	Wall mount bracket - Allows unit to be mounted on a wall
Consult Factory	Cable throttle control - Plastic coated steel cable increases and decreases engine RPM, thereby conserving fuel
Consult Factory	Electric start (battery & cables not included) - For easy starting
Consult Factory	Battery & battery cables - Adds battery and cables to units with electric start



AS2-SE05-30M

Model #	AX-0001	AX-0002	AX-0003	AX-0004	AX-0009	AX-0015
AC1-SE03-30M		●		●	●	
AS2-SE05-30M	●		●		●	
AS2-S305-30M			●			
AS2-SE75-30M			●		●	
AS2-SH08-30M			●			●
AS2-SR09-30M			●			
AS2-SH13-30M			●			

Model #	AX-0016	AX-0017	AX-0019	AX-0022	Throttle (C/F)	Electric (C/F)	Battery (C/F)
AC1-SE03-30M				●			
AS2-SE05-30M				●			
AS2-S305-30M				●			
AS2-SE75-30M				●			
AS2-SH08-30M		●		●	●		●
AS2-SR09-30M				●	●	●	●
AS2-SH13-30M	●		●	●	●		●

**3R Sales & Service • 27 4th ST NW
Barberton, OH 44203 • 330-753-8394
www.3rsalesandservice.com**

1-800-824-8252