



{Portable}

8 Gallon Gasoline - Two Stage

An excellent choice for jobsite tasks requiring higher CFM and air capacity. These models are ideal for remote locations.



AS2-PR09-08M

Additional Features:


- ✓ Industrial Honda OHV or Subaru OHC engine
- ✓ Engine oil drain
- ✓ Cast iron cylinder
- ✓ Splash lubricated cast iron crankcase
- ✓ Aluminum head for heat dissipation
- ✓ Large canister intake filter
- ✓ 16.5-inch fly wheel for extra cooling and longer life
- ✓ Powder coated 8-gallon twin tank receivers
- ✓ Convenient lifting handles
- ✓ 7-gauge base plate to reduce vibration
- ✓ Manual drain valves for proper maintenance
- ✓ Quality pilot valve unloader



		<p>Quality cast iron two stage compressor</p>
<p>Stainless-steel braided discharge hose</p>		
		<p>Belt tightening system pulls engine straight to ensure constant belt alignment</p>
<p>Regulator and two gauges for tank and outlet pressure</p>		
		<p>14-gauge powder coated two-piece belt guard with 1/4-turn release for quick access to belts</p>
<p>Two (2) pneumatic tires with tubes and steel hubs</p>		
		<p>Pneumatic idle control to conserve fuel</p>

Specifications:

Model #	AS2-PH08-08M	AS2-PR09-08M
Engine	Honda OHV	Subaru OHC
Horsepower	9.0	9.0
CFM @ 175 PSI	17.2	17.2
Pump	Schulz	Schulz
Dim. (LxWxH)	44in.x26in.x31in.	44in.x26in.x31in.
Shipping weight	330 lbs.	330 lbs.
Net weight	260 lbs.	260 lbs.

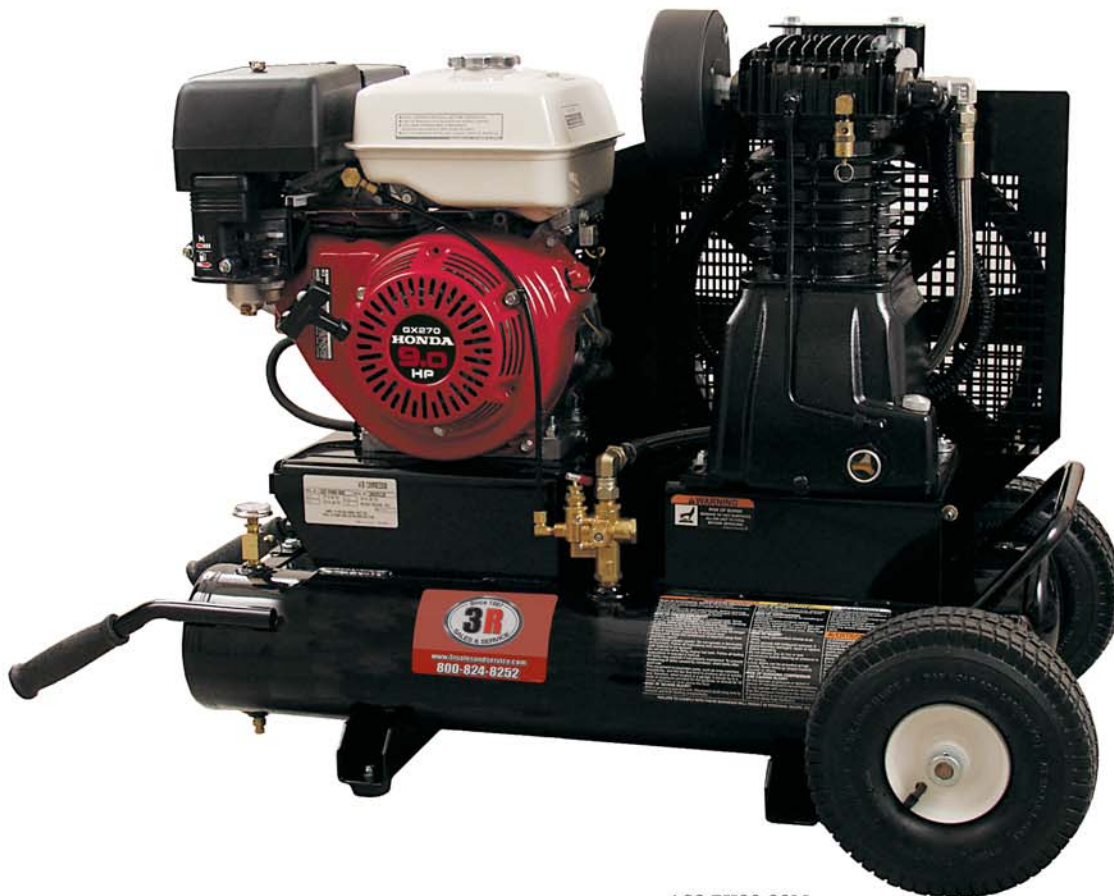

AS2-PH08-08M

Options:

AX-0003	Manual drain metal bowl - Drains moisture from air system
Consult Factory	Cable throttle control - Plastic coated steel cable increases and decreases engine RPM, thereby conserving fuel
TX-1002-W	Puncture-proof tires - Tires are flat-free, maintenance-free and non-marking, 10-inch, white hub, two tires

Model #	AX-0003	Cable (C/F)	TX-1002-W
AS2-PH08-08M	●	●	●
AS2-PR09-08M	●	●	●

**3R Sales & Service • 27 4th ST NW
Barberton, OH 44203 • 330-753-8394
www.3rsalesandservice.com**

1-800-824-8252