

{ Stationary }



80 Gallon Electric - Single/Two Stage

The ultimate in tank capacity! Perfect for shops and service bays where compressed air is considered a 4th utility.

Additional Features:

- ✓ Auto start/stop
- ✓ Cast iron cylinder
- ✓ Splash lubricated aluminum crankcase and head (AC1-SE05-80M)
- ✓ Splash lubricated cast iron crankcase and aluminum head (Two stage models)
- ✓ Large canister intake filter
- ✓ Large fly wheel for extra cooling and longer life
- ✓ 14-gauge powder coated two-piece belt guard with 1/4-turn release for quick access to belts (5.0-HP models)
- ✓ 14-gauge powder coated one-piece belt guard for quick access to belts (7.5-HP model)
- ✓ Two stage intercooler
- ✓ Powder coated ASME coded 80-gallon receiver tank
- ✓ Manual drain valves for proper maintenance
- ✓ Magnetic starter with mounting box and wiring



AS3-VE75-80M

Specifications:


Model #	AC1-SE05-80M	AS2-SE05-80M	AS2-S305-80M [^]	AS3-VE75-80M
Motor	208-230V, 22.5-20.0A	208-230V, 22.5-20.0A	230V, 3Ø, 12.2A	208-230V, 35.0 A
Horsepower	5.0	5.0	5.0	7.5
CFM @ 175 PSI	11.7 @ 100 PSI	16.9	16.9	24.0
Pump	Fini	Schulz	Schulz	Schulz
Dim. (LxWxH)	34in.x26.5in.x69.5in.	34in.x26in.x72.5in.	34in.x26in.x72.5in.	24in.x35in.x66in.
Shipping weight	525 lbs.	585 lbs.	526 lbs.	610 lbs.
Net weight	406 lbs.	466 lbs.	407 lbs.	491 lbs.

[^]Three-phase unit.

Options:

- Consult Factory Three-Phase, 460V - Converts 230V three-phase units to be operated on 460V three-phase power
- Consult Factory Three-Phase, 208-230V - Converts 7.5 HP single phase unit to three-phase power

Model #	3-Phase 460V (C/F)	3-Phase 208-230V (C/F)
AS2-S305-80M	●	
AS3-VE75-80M	●	●

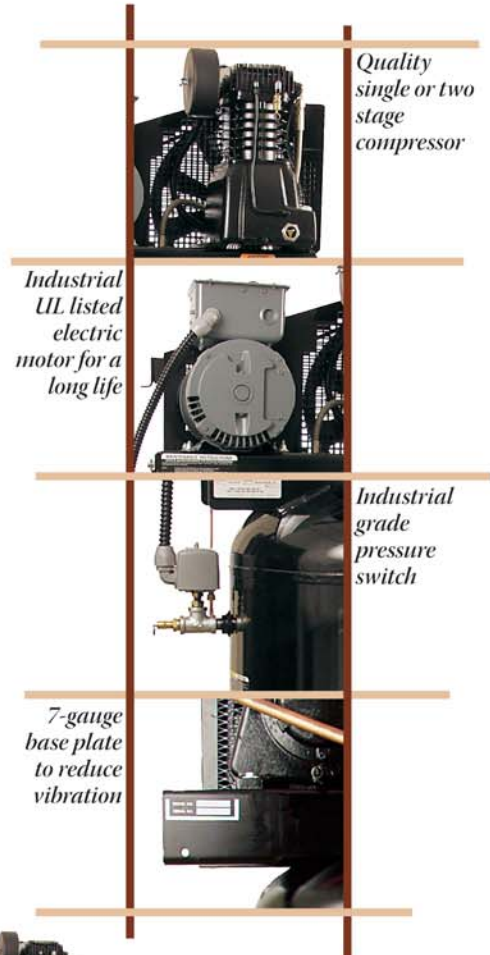

Quality single or two stage compressor

Industrial UL listed electric motor for a long life

Industrial grade pressure switch

7-gauge base plate to reduce vibration



AS2-SE05-80M



CSA Certified:
AC1-SE05-80M
AS2-SE05-80M

**3R Sales & Service • 27 4th ST NW
Barberton, OH 44203 • 330-753-8394
www.3rsalesandservice.com**

1-800-824-8252