



{Portable}

Generators

12000 - 13000 Maximum Wattage


State-of-the-art design features combined with a whopping 13000 maximum wattage allows contractors with "portable power plant" requirements to get the job done efficiently.



GEN-12000-OMHE

Additional Features:

- ✓ Low oil shutdown engine with electric start (battery included)
- ✓ Brushless 120V/240V alternator
- ✓ Idle control
- ✓ Easy-to-read fuel gauge
- ✓ Voltmeter/hour meter
- ✓ USDA/USFS-approved spark arrestors
- ✓ Circuit breaker protected
- ✓ Meets CARB and EPA emission standards
- ✓ Solid steel threaded axles
- ✓ Pneumatic tires with tubes (4)
- ✓ Fuel tanks are powder coated outside, zinc-plated inside to prevent rusting
- ✓ Heavy-duty industrial air cleaners hold up under the dustiest conditions

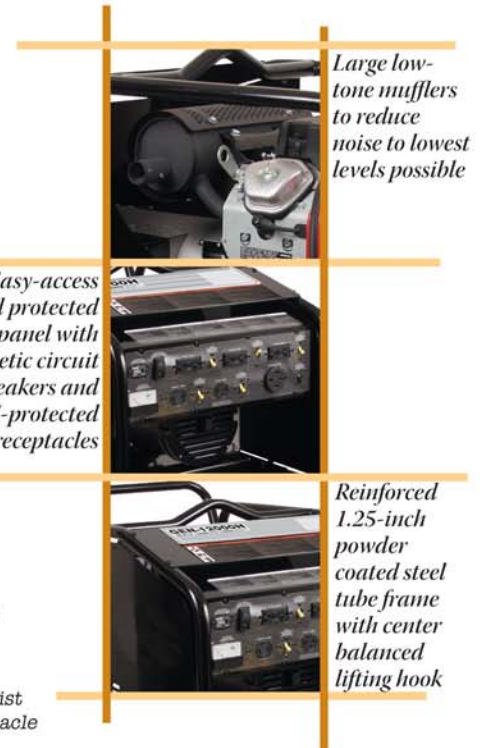

Large low-tone mufflers to reduce noise to lowest levels possible

Easy-access and protected control panel with magnetic circuit breakers and GFCI-protected receptacles

Reinforced 1.25-inch powder coated steel tube frame with center balanced lifting hook

Specifications:

Model #	GEN-12000-OMHE	GEN-13000-OMSE
Max. AC output	12,000 watts	13,000 watts
Rated AC output	10,000 watts	11,500 watts
HP/Displacement	20.0/620 cc	22.0/650 cc
Engine	Honda OHV	Subaru OHV
Frequency/Voltage	60Hz/120V/240V	60Hz/120V/240V
Max. amps (120V/240V)	100.0/50.0	108.3/54.2
Cont. amps (120V/240V)	83.3/41.7	95.8/47.9
Receptacles	(3) 120V, 20A GFCI duplex 120V, 30A twist lock 120V/240V, 30A twist lock 120V/240V, 50A	(3) 120V, 20A GFCI duplex 120V, 30A twist lock 120V/240V, 30A twist lock 120V/240V, 50A
Circuit breakers	(3) 20A toggle circuit breaker, single pole 30A toggle circuit breaker, single pole 30A toggle circuit breaker, double pole 50A toggle circuit breaker, double pole	(3) 20A toggle circuit breaker, single pole 30A toggle circuit breaker, single pole 30A toggle circuit breaker, double pole 50A toggle circuit breaker, double pole
Rated speed	3,600 RPM	3,600 RPM
Decibel rating	74.9	77.5
Fuel capacity	11.5 gallon	11.5 gallon
Run time (at full load)	7.5 hours	7.5 hours
Dim. (LxWxH)	42.6in.x29.2in.x39.4in.	42.6in.x29.2in.x39.4in.
Shipping weight	540 lbs.	603 lbs.
Net weight	476 lbs.	539 lbs.



GX-0005
CS6369A
50 Amp twist lock receptacle



GFCI 5-20R



14-50R
50A



L14-30R
125/250V



L5-30R
125 VAC

Noise level tested at seven meter (75% load). Rating represents minimum noise level rating.

Options:

- 32-0915 generators
- GX-0003
- GX-0005
- TX-1304-W
- RV Generator Adapter - 30A/125V female/male; use to connect RV cordsets to 30A
- Skid feet - For stationary applications
- 50 Amp twist lock receptacle - Marine receptacle; for routine marine applications
- Puncture-proof tires - Tires are flat-free, maintenance-free and non-marking, 13-inch, white hub, four tires

**3R Sales & Service • 27 4th ST NW
Barberton, OH 44203 • 330-753-8394
www.3rsalesandservice.com**

1-800-824-8252

Model #	32-0915	GX-0003	GX-0005	TX-1304-W
All Models	●	●	●	●

